

Brakes Plus – Jenks OK

Approx. West 101st Place & South Elm Street

Jenks, OK 74037

Overhead Door / Storefront Bid Qualifications:

1. Base bid should include the attached chain hoists in lieu of the specified model. The door installer MUST be factory certified by the door manufacturer. Approved Door Manuf: Raynor / Overhead Door / Clopay.
2. Overhead Doors must be installed by a factory-trained installer. Certification will be required during the submittal process.
3. Provide an alternate price for clear anodized overhead door and storefront.

Sitework Bid Qualifications:


Please include specific unit costs for the following items:

1. Price pit excavation separately from other work.
2. Unit prices for cut and haul of unsuitable soils. Unit prices for Export dig & haul off truck measure – price for 1 cubic yard.
3. Import, place and compact truck measure – price for 1 cubic yard.

Electrical Bid Qualifications:

1. Use Rexel Energy ONLY for Lighting – NEVER Electrical Gear.
2. NEVER use Eaton Products for anything on Brakes Plus Projects.
3. Approved Gear Manufacturers: GE / Siemens / Square D

CLOPAY COMMERCIAL controlgard® SD chain hoist

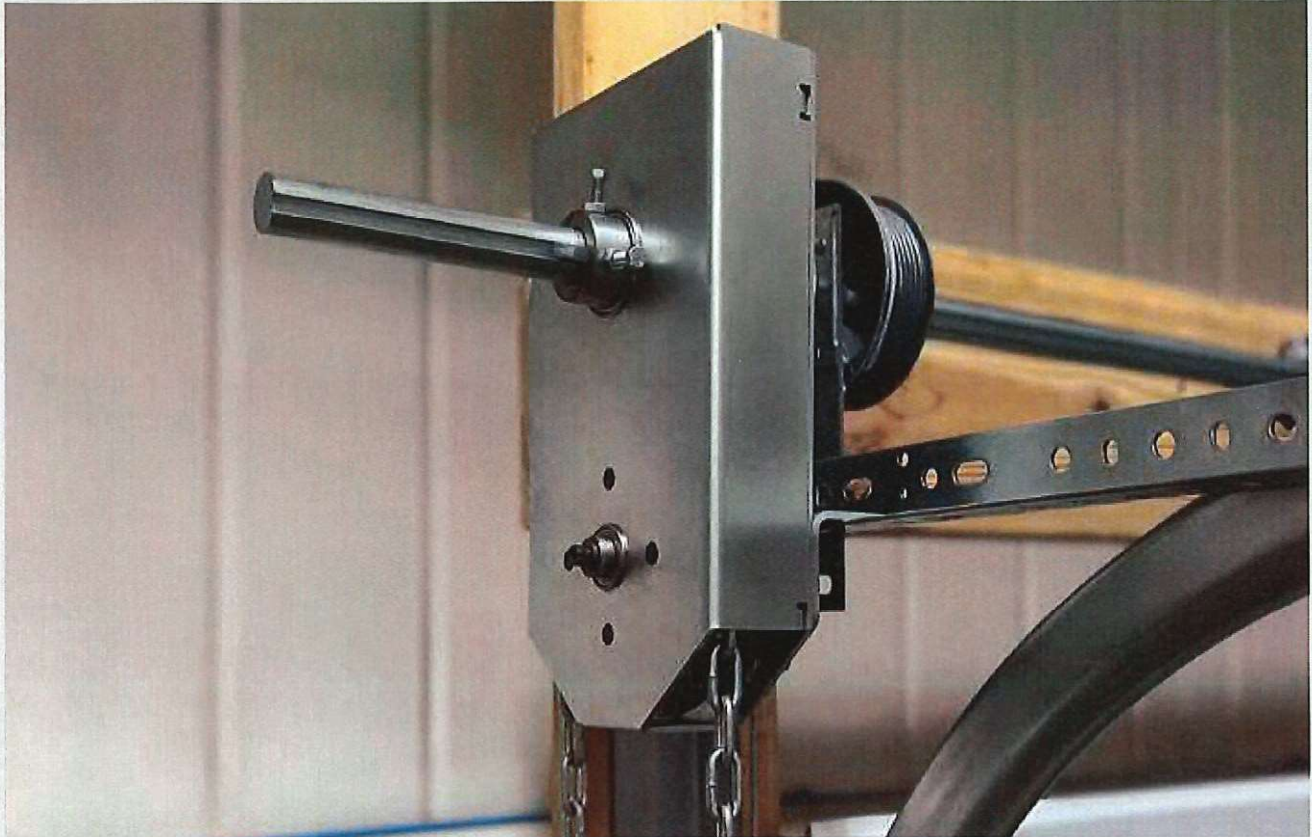

KEEP USERS SAFE AND EXTEND THE LIFE OF YOUR CHAIN-OPERATED DOORS

The ControlGard® Chain Hoist features an integral braking system that only allows it to move when the user is actively pulling the chain, reducing the risk of expensive door damage and increasing the safety of users and those nearby. This manual operator possesses many benefits above and beyond standard chain hoists, including:

- **ENHANCED SAFETY:** When standard chain hoist operators are pulled incorrectly, they can spin out of control, causing the door to slam down and the chain to fly up, putting those nearby at risk. The ControlGard® SD chain hoist was designed to utilize steady pressure to operate – it stays in place unless a user actively pulls on the chain.
- **IMPROVED DOOR LIFE:** Motor-operated doors typically last longer than chain-operated doors because of their controlled operation. ControlGard® controls the operation and reduces the risk of abuse, putting chain-operated doors on par with motor-operated doors.
- **COMPACT DESIGN:** The ControlGard® chain hoist eliminates the need for a bulky external governor. It features an integral brake that is seamlessly integrated into the compact chain hoist mechanism.
- **OPENING OPTIONS:** The integral brake restricts the door's movement when the chain is not being used allowing the door to be kept partially open without the need for a chain keeper.

ControlGard® SD can be installed on new or retrofit applications and is ideal for vehicle service stations, warehouses, restaurants, hospitality and drive-through doors.

The ControlGard® SD chain hoist is an easy upgrade to most manually operated sectional door applications. The hoist is available in four different kits that install in minutes.

- 2.8:1 primary reduction in 1" bore (Model CGSD28B4)
- 2.8:1 primary reduction in 1-1/4" bore (Model CGSD28B5)
- 3.7:1 primary reduction in 1" bore (Model CGSD37B4)
- 3.7:1 primary reduction in 1-1/4" bore (Model CGSD37B5)

Pull Load on Hand Chain	Max Door Weight Rating at 2:8:1 Reduction	Max Door Weight Rating at 3:7:1 Reduction
35 lbs.	0 – 300 lbs.	301 – 450* lbs.

* Door weights greater than 450 lbs. may be possible, depending on drum type.

NOTE – Installation of the ControlGard® SD Chain Hoist requires a solid shaft that extends a minimum of 5" past the end bearing plate.

HOIST KIT DETAILS

KIT INCLUDES:

- Kit includes enough chain to install on a torsion shaft located 14'0" floor to shaft center (for example, a 10'0" tall door with 36" of high lift).
- Additional 20' chain packs available for taller doors or lift.

Not recommended for use with standard-lift or low headroom tracks.

2-YEAR LIMITED WARRANTY



DISTRIBUTED BY:



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

CMDC-CONTROLGARD-23_REV0824